

## METAL SURFACE PANEL LIGHT

Metal surface panel lights are a type of LED lighting fixture that combines the energy efficiency of LEDs with the sleek look and durability of a metal frame.



### Features

- **Strength and Durability:** The metal housing provides superior protection for the LED components compared to plastic alternatives.
- **Heat Dissipation:** Metal conducts heat more effectively than plastic, which helps to keep the LEDs cooler and extend their lifespan.
- **Modern Aesthetic:** The clean lines and metallic finish of these lights create a modern and sophisticated look.
- **Variety of Options:** Metal surface panel lights come in a wide range of sizes, wattages, and color temperatures.
- **Even Illumination:** Just like other LED panels, they distribute light evenly across their surface, eliminating glare and creating a comfortable lighting environment.


### Product Benefits

- Energy Savings
- Long Lifespan
- Durability
- Light Quality
- Dimming Capability

## Technical Information

|                          |            |                                |                        |
|--------------------------|------------|--------------------------------|------------------------|
| <b>WATT</b>              | 9W-15W-20W | <b>POWER FACTOR</b>            | > 0.95                 |
| <b>TYPE</b>              | LED LIGHT  | <b>EFFICIENCY</b>              | > 90 %                 |
| <b>BODY COLOR</b>        | WHITE      | <b>POWER SOURCE</b>            | 220VAC-240VAC,<br>50HZ |
| <b>BRAND</b>             | QLUX       | <b>MATERIAL</b>                | METAL                  |
| <b>GUARANTEE</b>         | 2 YEAR     | <b>SURGE PROTECTION</b>        | 6KV                    |
| <b>INPUT CURRENT</b>     | 0.028      | <b>OPERATING FREQUENCY(HZ)</b> | 50                     |
| <b>OPERATING VOLTAGE</b> | 100~300    | <b>LUMINOUS EFFICACY(IM/W)</b> | 71.7                   |
| <b>INPUT VOLTAGE</b>     | 220V       | <b>CRI</b>                     | > 80                   |
| <b>FREQUENCY</b>         | 50 HZ      | <b>DIMENSION(MM)</b>           | 120-170-225            |
| <b>BEAM ANGLE</b>        | 160°       | <b>CUTOUT(MM)</b>              | 105-155-205            |
| <b>COLOR</b>             | CW-NW-WW   | <b>DOB/ DRIVER BASE</b>        | ISOLATED LED<br>DRIVER |

## Dimension

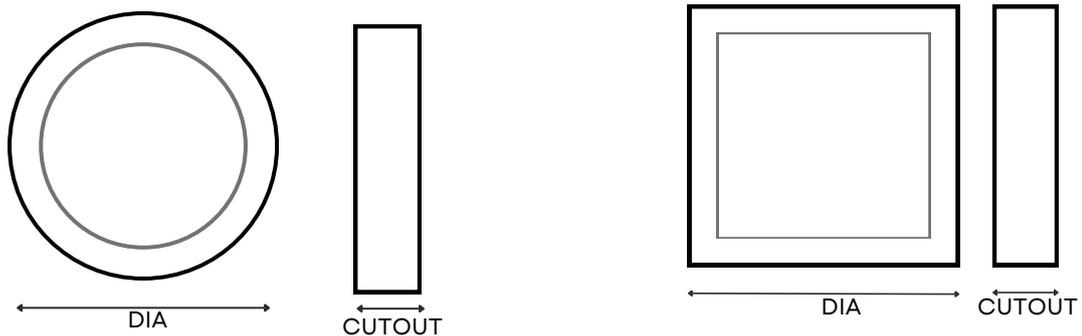

## Application

They excel in commercial spaces like warehouses and offices due to their durability, while their even illumination and design aesthetic make them suitable for hospitality settings and stylish homes.